


The Nexxt Solutions modular patch panel is the perfect customizable solution for setting up a network. Designed to mount to any standard 19-inch horizontal rack or cabinet, this panel is offered in a 24 and 48 port configuration. Each panel features universal jack terminations, with built-in anchoring points. Unlike some patch panels that only allow one configuration, the modular type provides the flexibility of just using the number of jacks needed, including the future expansion of the installation according to your changing needs, with the advantage of color-coding connections in order to better organize and manage your entire network. By incorporating clear numbering on both the front and back of each panel, installers are able to quickly and easily identify cable runs.



AW192NXT40

AW192NXT41

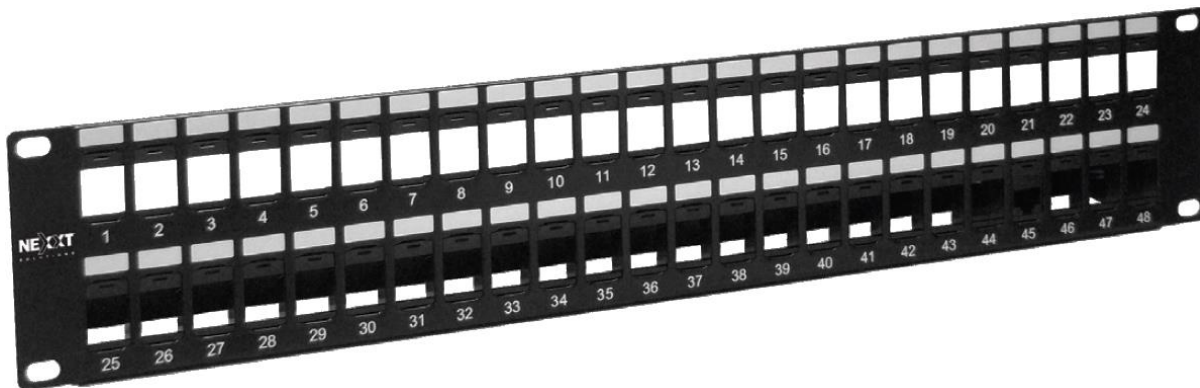

Product specifications

Panel characteristics

No. of ports	24	48
Front panel	SPCC, 1.5mm thickness with black (RAL 9005) finish	
Support bar	SPCC, 1.5mm thickness with black (RAL 9005) finish	
Rear panel	SPCC, 1.5mm thickness with black (RAL 9005) finish	
Panel color	Black varnish paint (RAL 9005)	
Effective U space	1U	2U
Mounting type	Rack mounted	
Jack bracket set	ABS, UL 94V-0	
PCB	FR4, UL 94V-0	
Insertion force	30N max (IEC 60603-7-5)	
Retention strength	7.7 Kgs between jack and plug	
Operating temperature	-10°C to 60°C (ISO/IEC 11801, ANSI/TIA/EIA-568-C.2)	

Dimensions

Height	1,75in	3,5in
External width	19,22in	
Depth	3,66in	4,33in
Includes	4 M5 x L12mm screw set	

Electrical characteristics

Voltage Rating	300V
Temperature Rating	75°C

Certifications and standards

International Standards	ANSI/TIA/EIA-568-C.2, ISO/IEC 11801
-------------------------	-------------------------------------

Miscellaneous

MPN	AW192NXT40	AW192NXT41
UPC	798303031431	798304031447
Labeling	NEXXT SOLUTIONS	
Packaging	Carton Box	
Quantity per Bag	1 unit	
Cuft	2,82 per 15 units	2,40 per 9 units
Warranty	5-year limited warranty**	

SPCC: Commercial grade, cold rolled steel sheets